



新大管件  
XinDa Plastic Pipe

新大  
XinDa 管件  
Plastic Pipe



浙江新大塑料管件有限公司  
ZHEJIANG XINDA PLASTIC PIPE CO.,LTD.



## 简介

浙江新大塑料管件有限公司是一家专业从事燃气及供给水用的聚乙烯（PE）电熔连接、热熔对接、热熔承插、PE球阀及PPR管件生产企业。公司位于浙江省余姚市七千年原始文化遗址的河姆渡镇，公司下设总经理办公室、厂长室、常务总经理室、总师室、制造部、技术部、质检部、财务部、国内贸易部、国际贸易部、供应部、货运部等12个管理部门，现有占地面积42000多平方，建筑面积38000余平方，拥有固定资产4000多万元，现有员工200多人，专业技术人员13名，工程师5名，高级工程师2名。专用注塑机38台（150克-10万克），辅助设备42台，主要生产 $\Phi 20\text{mm}$ ~ $\Phi 1000\text{mm}$ 燃气及供给水聚乙烯管件，拥有国内最大的注塑机10万克，最大的管件至1000mm, 到目前为止为国内规格最多最齐全的生产PE管件生产企业，年生产能力4000余吨（约200万件以上）。

本公司检测手段齐全，拥有各种先进检测设备，相继开展了耐压爆破试验、拉力试验、熔融指数试验、氧化诱导，从而确保了产品从原材料到成品各个环节的质量。公司所生产的电熔管件经国家化学建材测试中心测试，各项性能指标均符合GB15558.2/EN1555和GB13663.2/EN12201标准，并通过ISO9001-2000国际标准质量体系认证，又通过国家建设部科技成果评估鉴定，评定为国内领先水平，产品已取得国家技术监督总局颁发的“压力管道元件生产许可证”“卫生许可证”，并加入中国化工防腐技术协会会员单位。荣获国家消费者信得过产品荣誉证书。

公司坚持以“一流的质量、一流的信誉、一流的服务”经营方针，以“质量第一、信誉至上、诚信服务”的原则，满足广大用户的需要，坚持以“全方位服务”为宗旨，欢迎国内外客户来我司参观指导、交流与合作，共同为推进塑料管道工业水平而多做贡献。



# Briefing

## Introduction

Zhejiang xinda plastic pipe co.,Ltd. is a leading professional manufacturer in producing PE Pipe Fittings, our products range include PE Electrofusion Fittings, PE Butt fusion Fittings, PE Socket fusion Fittings, PE/Steel Transition Fittings, PE Ball Valve, PPR Fittings and Other Accessories, the size from dia 20mm to dia 1000mm.

Our company locate at Hemudu town, Ningbo of Zhejiang province which have 7000 years historic cultural site. There are 38000 m<sup>2</sup> workshop on 42000 m<sup>2</sup> floor space, with 12 administration department in our company: General Manager, Director office, Chief Engineer Office, Finance Dept, Production Dept, Technical Dept, QC Department, International Trade Dept, Domestic Trade Dept, Purchase Dept, Logistic Dept, etc, total have 200 staffs work hard at their position. We own more than 35 million RMB of capital asserts, 38 sets plastic injection machines from 150g to 100000g and 42 sets accessory Equipments.

We have complete of advanced testing equipment in order to make high quality products from raw material to finished products. We have developed five methods of test continuously: Melt index test, Oxidation induction test, Tensile strength test, Compression resistance test, Break resistance test. The Electrofusion Fittings also have be tested by National Chemical and Building Material Lab Center, it's Performances are according to EN1555-3 and EN12201-3 Standards. At the same time, it pass National Construction Administration scientific and technological achievements evaluation and has be assessed high level in China. We have gotten Hygienic License and Pressure Pipe Fitting production License.

Our company insist management policy "High quality, Good Credit Standing and Good Service" , "Quality First, Credit First and Sincerity Service" are our principle, We will try our best to meet all the clients requirements and welcome all clients to visit our company and cooperation with us.



## Business Enterprise



办公区 Office



产品陈列室 Show Room



## 企业风貌

# Appearance



厂区公园 Company Garden



生产区 Workshop



办公大厅 Hall




生产车间 Injection Plant



# 证书 Certificates

严格质量管理 制造优质产品



## 测试设备 Test Equipment



分析天平  
Analytical Balance



电阻测试台  
Test Resistance



静液压试验机  
Constant Temperature Compression  
Resistance Test Equipment



加热伸缩试验箱  
Heat Elongation Testing Machine



制样机  
Sample Equipment



制样机  
Sample Equipment



熔融指数测试仪  
Melt Index Tester



拉力试验机  
Tensile Strength Equipment



氧化诱导实验仪  
Oxidation Induction Equipment

## 管件原料基本性能

序号	性能	单位	要求	试验参数	试验方法
1	密度	Kg/m <sup>3</sup>	≥930 (基础树脂)	23℃	GB/T1033-1986中的方法D, 试样制备按GB/T1845.1-1999中的3.3.1规定
2	熔体质量流动速率MFR	g/10min	0.2~1.4, 且最大偏差不应超过混配料标称值的±20%	190℃, 5kg	GB/T3682-2000
3	热稳定性 (氧化诱导时间)	min	>20	200℃	GB/T17391-1998
4	挥发分含量	mg/kg	≤350		附录C
5	水分含量 <sup>a</sup>	mg/kg	≤300		ASTMD4019: 1994a
6	炭黑含量 <sup>c</sup> (质量分数)	%	2.0~2.5		GB/T13021-1991
7	炭黑分散 <sup>c</sup>	级	≤3		GB/T18251-2000
8	颜料分散 <sup>d</sup>	级	≤3		GB/T18251-2000
9	耐气体组分	h	≥20	80℃, 2MPa (环应力)	附录D
10	耐快速裂纹扩展 (RCP)				
	全尺寸 (FS) 实验: $d_s \geq 250\text{mm}$ 或 S4实验: 管材试样壁厚 $\geq 15\text{mm}$	Mpa	全尺寸实验的临界压力 $P_{Lc} \geq 1.5X\text{MOP}$	0℃	ISO13478: 1997
		Mpa	S4实验的临界压力 $P_{Lc} \geq \text{MOP}/2.4 \sim 0.072^e$	0℃	GB/T19280-2003
11	耐慢速裂纹增长 ( $e_s \geq 5\text{mm}$ )	h	165	8℃, 0.8MPa (实验压力) <sup>f</sup> 80℃, 0.92MPa (实验压力) <sup>g</sup>	GB/T18476-2001

a 非黑色混配料应符合表6中的耐候性要求。  
 b 当测量的挥发分含量不符合要求时才测量水分含量。仲裁时, 应以水分含量的测量结果作为判定依据。  
 c 仅适用于黑色混配料。  
 d 仅适用于非黑色混配料。  
 e 如果S4试验结果不符合要求, 可以按照全尺寸试验重新进行测试, 以全尺寸试验的结果作为最终依据。  
 f PE80, SDR11试验参数。  
 g PE100, SDR11试验参数。

## 管件性能要求


序号	项目		项目	
1	热稳定性 (200℃), min		>20min	
2	短期静液压强度	管件 无破坏	20℃	9.0MPa韧性破坏时间>100h
		焊口 无渗漏	80℃	4.6MPa脆性破坏时间>165h 4.0MPa破坏时间>1000h
3	加热伸缩		管件外径及长度变化不超过 ±5%管件外形不允许有时显变化	



## 电熔系列 Electrofusion Fitting Series




电熔套管  
Electrofusion Coupler

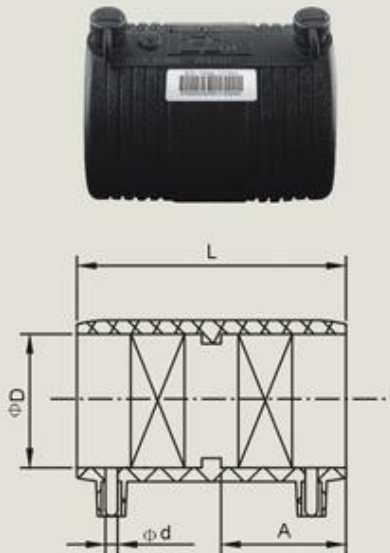

规格 (Specifications) $\phi D$	L	A	$\phi d$	订货编号 (Item Number)
20	85	40	4.7	XDI-20
25	90	40	4.7	XDI-25
32	90	40	4.7	XDI-32
40	95	45	4.7	XDI-40
50	105	50	4.7	XDI-50
63	110	50	4.7	XDI-63
75	135	65	4.7	XDI-75
90	140	65	4.7	XDI-90
110	150	70	4.7	XDI-110
125	170	80	4.7	XDI-125
160	180	85	4.7	XDI-160
180	210	100	4.7	XDI-180
200	220	100	4.7	XDI-200
250	215	105	4.7	XDI-250
315	225	110	4.7	XDI-315
355	265	125	4.7	XDI-355

电熔90°弯头  
Electrofusion Elbow 90°

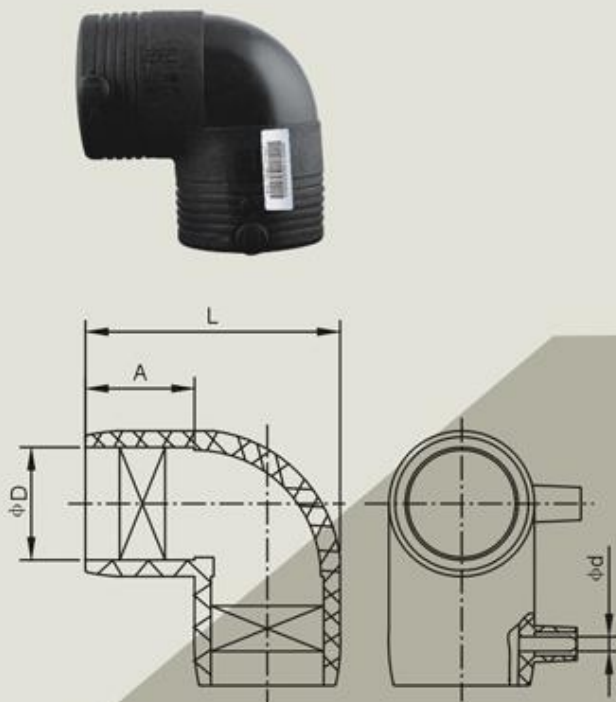



规格 (Specifications) $\phi DX90^\circ$	L	A	$\phi d$	订货编号 (Item Number)
25×90°	85	45	4.7	XDL-25
32×90°	95	45	4.7	XDL-32
40×90°	95	50	4.7	XDL-40
50×90°	110	50	4.7	XDL-50
63×90°	130	55	4.7	XDL-63
75×90°	155	60	4.7	XDL-75
90×90°	170	65	4.7	XDL-90
110×90°	200	70	4.7	XDL-110
125×90°	225	80	4.7	XDL-125
160×90°	265	80	4.7	XDL-160
180×90°	290	85	4.7	XDL-180
200×90°	360	135	4.7	XDL-200

**注** 1.根据用户需要可定制生产。2.订货请注明详细规格。3.产品尺寸仅供参考。  
1.Can be customized. 2. Please mark specifications in the order. 3.The sizes for your reference only.




## 电熔系列 Electrofusion Fitting Series

电熔45°弯头  
Electrofusion Elbow 45°



规格 (Specifications) $\phi D$	L	A	$\phi d$	订货编号 (Item Number)
50×45°	130	50	4.7	XDVL-50
63×45°	175	63	4.7	XDVL-63
90×45°	230	85	4.7	XDVL-90
110×45°	270	90	4.7	XDVL-110
160×45°	290	85	4.7	XDVL-160
200×45°	340	90	4.7	XDVL-200

电熔异径套管  
Electrofusion Reducer

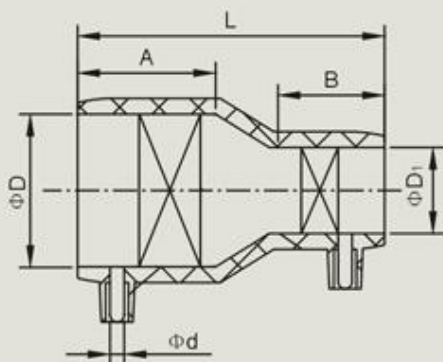


规格 (Specifications) $\phi DX \phi D_1$	L	A	B	$\phi d$	订货编号 (Item Number)
25×20	95	45	40	4.7	XDS-25/20
32×20	95	45	45	4.7	XDS-32/20
32×25	95	45	45	4.7	XDS-32/25
40×25	100	50	40	4.7	XDS-40/25
40×32	100	50	40	4.7	XDS-40/32
50×25	115	55	40	4.7	XDS-50/25
50×32	115	55	40	4.7	XDS-50/32
50×40	115	50	50	4.7	XDS-50/40
63×25	120	60	40	4.7	XDS-63/25
63×32	120	60	40	4.7	XDS-63/32
63×40	120	60	40	4.7	XDS-63/40
63×50	120	55	50	4.7	XDS-63/50
75×50	130	65	50	4.7	XDS-75/50
75×63	130	65	50	4.7	XDS-75/63
90×50	140	70	50	4.7	XDS-90/50
90×63	140	70	50	4.7	XDS-90/63
90×75	140	70	60	4.7	XDS-90/75
110×63	160	75	55	4.7	XDS-110/63
110×75	160	75	60	4.7	XDS-110/75
110×90	160	75	65	4.7	XDS-110/90
125×63	160	80	60	4.7	XDS-125/63
125×90	170	80	70	4.7	XDS-125/90
125×110	170	85	70	4.7	XDS-125/110
160×110	190	95	75	4.7	XDS-160/110
160×125	190	95	75	4.7	XDS-160/125
200×160	210	95	85	4.7	XDS-200/160



# 电熔系列 Electrofusion Fitting Series



电熔异径三通  
Electrofusion Reducing Tee

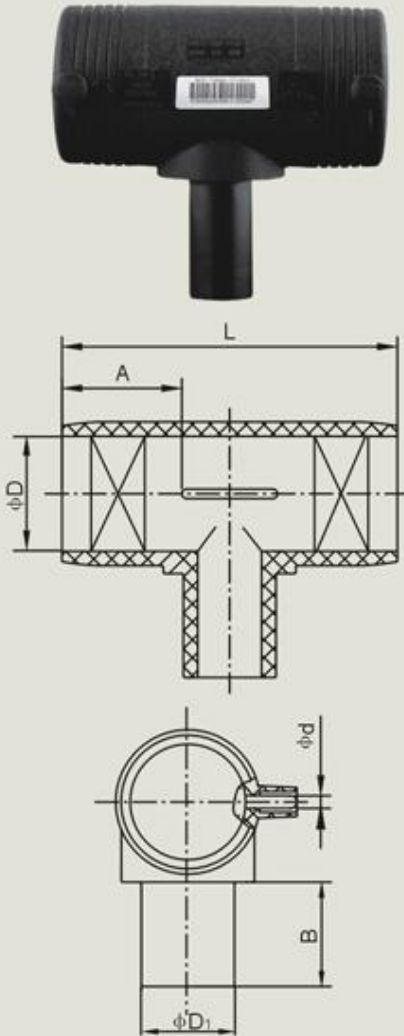

规格 (Specifications) ϕDX ϕD <sub>1</sub> X ϕD	L	A	B	ϕd	订货编号 (Item Number)
25×20×25	110	45	50	4.7	XDST-25/20
32×20×32	120	45	50	4.7	XDST-32/20
32×25×32	120	45	50	4.7	XDST-32/25
40×25×40	125	45	55	4.7	XDST-40/25
40×32×40	125	45	55	4.7	XDST-40/32
50×25×50	145	55	55	4.7	XDST-50/25
50×32×50	145	55	55	4.7	XDST-50/32
50×40×50	145	55	55	4.7	XDST-50/40
63×25×63	165	55	60	4.7	XDST-63/25
63×32×63	165	55	60	4.7	XDST-63/32
63×40×63	165	55	60	4.7	XDST-63/40
63×50×63	165	55	60	4.7	XDST-63/50
75×32×75	195	70	70	4.7	XDST-75/32
75×40×75	195	70	70	4.7	XDST-75/40
75×50×75	195	70	70	4.7	XDST-75/50
75×63×75	195	70	70	4.7	XDST-75/63
90×32×90	210	70	75	4.7	XDST-90/32
90×40×90	210	70	75	4.7	XDST-90/40
90×50×90	210	70	75	4.7	XDST-90/50
90×63×90	210	70	75	4.7	XDST-90/63
90×75×90	210	70	75	4.7	XDST-90/75
110×32×110	240	75	80	4.7	XDST-110/32
110×40×110	240	75	80	4.7	XDST-110/40
110×50×110	240	75	80	4.7	XDST-110/50
110×63×110	240	75	80	4.7	XDST-110/63
110×75×110	240	75	80	4.7	XDST-110/75
110×90×110	240	75	80	4.7	XDST-110/90
125×90×125	260	80	85	4.7	XDST-125/90
125×110×125	260	80	85	4.7	XDST-125/110
160×63×160	310	90	90	4.7	XDST-160/63
160×90×160	310	90	90	4.7	XDST-160/90
160×110×160	310	90	90	4.7	XDST-160/110
160×125×160	310	90	90	4.7	XDST-160/125
200×160×200	360	100	100	4.7	XDST-200/160


注 1.根据用户需要可定制生产。2.订货请注明详细规格。3.产品尺寸仅供参考。  
1.Can be customized. 2 Please mark specifications in the order. 3.The sizes for your reference only.






## 电熔系列 Electrofusion Fitting Series

电熔等径三通  
Electrofusion Equal Tee

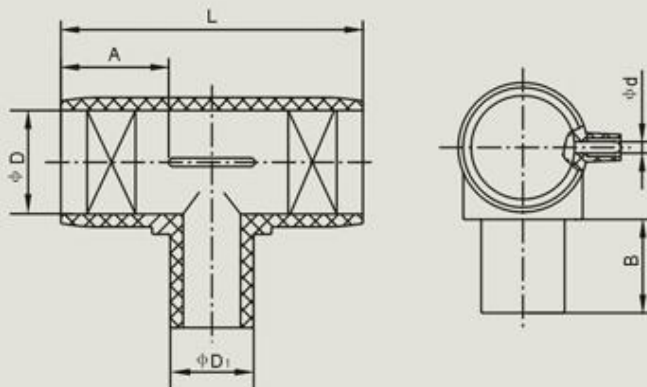

规格 (Specifications) $\phi D \times \phi D \times \phi D$	L	A	B	$\phi d$	订货编号 (Item Number)
20×20×20	100	40	50	4.7	XDT-20
25×25×25	110	45	50	4.7	XDT-25
32×32×32	120	45	50	4.7	XDT-32
40×40×40	125	45	55	4.7	XDT-40
50×50×50	145	55	55	4.7	XDT-50
63×63×63	165	55	60	4.7	XDT-63
75×75×75	195	70	70	4.7	XDT-75
90×90×90	210	70	75	4.7	XDT-90
110×110×110	240	75	80	4.7	XDT-110
125×125×125	260	80	85	4.7	XDT-125
160×160×160	310	90	90	4.7	XDT-160
180×180×180	340	95	85	4.7	XDT-180
200×200×200	360	100	100	4.7	XDT-200

冷凝水缸  
Syphon pot

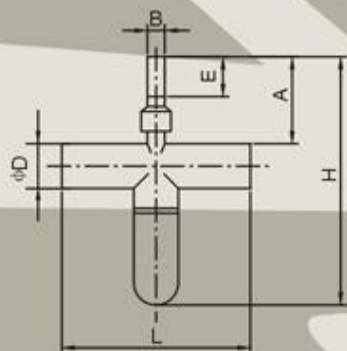


规格 (Specifications) $\phi D$	L	A	B	E	H	订货编号 (Item Number)
63	230	230	32	95	600	XDX-63
90	280	230	32	95	700	XDX-90
110	380	230	32	95	770	XDX-110
160	430	230	32	95	770	XDX-160
200	420	230	32	95	700	XDX-200
250	520	230	32	95	780	XDX-250
315	620	230	32	95	890	XDX-315

## 电熔系列 Electrofusion Fitting Series




电熔管帽  
Electrofusion End Cap



规格 (Specifications) ϕ DX90°	L	A	ϕ d	订货编号 (Item Number)
32	60	45	4.7	XDM-32
40	65	50	4.7	XDM-40
50	70	50	4.7	XDM-50
63	80	50	4.7	XDM-63
90	95	65	4.7	XDM-90
110	110	65	4.7	XDM-110

电熔直通鞍型  
Electrofusion Branch Saddle

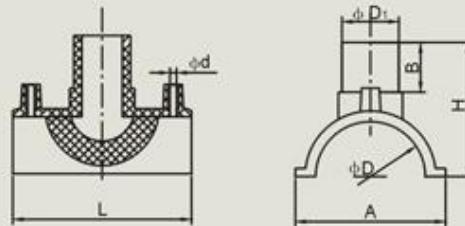


规格 (Specifications) ϕ DX ϕ D <sub>1</sub>	L	A	B	H	ϕ d	订货编号 (Item Number)
90×40	145	158	50	120	4.7	XDFI-90/40
90×50	145	158	55	125	4.7	XDFI-90/50
90×63	145	158	80	150	4.7	XDFI-90/63
110×40	145	160	50	120	4.7	XDFI-110/40
110×50	145	160	55	125	4.7	XDFI-110/50
110×63	145	160	80	150	4.7	XDFI-110/63
160×50	235	225	55	160	4.7	XDFI-160/50
160×63	235	225	115	220	4.7	XDFI-160/63
160×90	235	225	115	220	4.7	XDFI-160/90
200×50	235	255	55	155	4.7	XDFI-200/50
200×63	235	255	120	220	4.7	XDFI-200/63
200×90	235	255	120	220	4.7	XDFI-200/90
250×50	235	300	55	165	4.7	XDFI-250/50
250×63	235	300	125	235	4.7	XDFI-250/63
250×90	235	300	125	235	4.7	XDFI-250/90
315×50	235	305	55	235	4.7	XDFI-315/50
315×63	235	305	125	235	4.7	XDFI-315/63
315×90	235	305	125	235	4.7	XDFI-315/90

**注** 1.根据用户需要可定制生产。2.订货请注明详细规格。3.产品尺寸仅供参考。  
1.Can be customized. 2 Please mark specifications in the order. 3.The sizes for your reference only.


## 电熔系列 Electrofusion Fitting Series

电熔封堵鞍型  
Electrofusion Repair Saddle

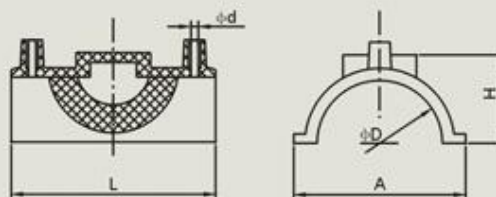

规格 (Specifications) $\phi D$	L	A	H	$\phi d$	订货编号 (Item Number)
90	145	158	65	4.7	XDU-90
110	145	160	65	4.7	XDU-110
160	235	225	100	4.7	XDU-160
200	235	255	100	4.7	XDU-200
250	235	300	100	4.7	XDU-250
315	235	305	100	4.7	XDU-315

电熔旁通鞍型  
Electrofusion Tapping Saddle

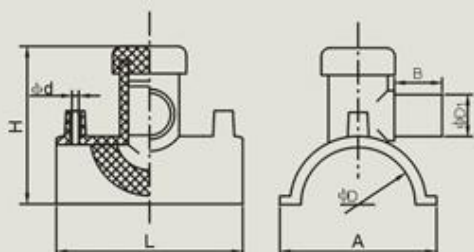


规格 (Specifications) $\phi DX \phi D_1$	L	A	B	H	$\phi d$	订货编号 (Item Number)
63×20	110	102	45	125	4.7	XDF-63/20
63×25	110	102	45	125	4.7	XDF-63/25
63×32	110	102	45	125	4.7	XDF-63/32
90×20	145	158	45	180	4.7	XDF-90/20
90×25	145	158	55	180	4.7	XDF-90/25
90×32	145	158	65	180	4.7	XDF-90/32
90×63	145	158	75	180	4.7	XDF-90/63
110×20	145	160	45	180	4.7	XDF-110/20
110×25	145	160	55	180	4.7	XDF-110/25
110×32	145	160	65	180	4.7	XDF-110/32
110×63	145	160	75	180	4.7	XDF-110/63
160×32	235	225	65	270	4.7	XDF-160/32
160×50	235	225	120	270	4.7	XDF-160/50
160×63	235	225	130	270	4.7	XDF-160/63
160×90	235	225	130	270	4.7	XDF-160/90
200×50	235	255	65	270	4.7	XDF-200/50
200×63	235	255	135	270	4.7	XDF-200/63
200×90	235	255	135	270	4.7	XDF-200/90
250×50	235	300	65	270	4.7	XDF-250/50
250×63	235	300	130	270	4.7	XDF-250/63
250×90	235	300	130	270	4.7	XDF-250/90
315×50	235	305	65	270	4.7	XDF-315/50
315×63	235	305	130	270	4.7	XDF-315/63
315×90	235	305	130	270	4.7	XDF-315/90



# 钢塑系列 PE/Steel Transition Fitting Series




直管式钢塑转换接头  
PE/Steel Transition Pipe

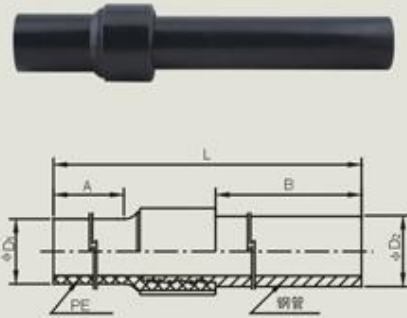

规格 (Specifications)		PE Φ D <sub>1</sub>	钢管 Φ D <sub>2</sub>	L	A	B	钢管 英寸	钢管 口径	订货编号 (Item Number)
25×3/4"	25钢塑	25	27	375	80	230	3/4"	20	XDGS-25/20
32×3/4"	32钢塑	32	27	375	80	230	3/4"	20	XDGS-32/20
32×1"	32钢塑	32	34	375	80	230	1"	25	XDGS-32/25
40×1"	40钢塑	40	34	375	80	230	1"	25	XDGS-40/25
40×1 1/4"	40钢塑	40	42	375	80	230	1 1/4"	32	XDGS-40/32
50×1 1/2"	50钢塑	50	48	375	80	230	1 1/2"	40	XDGS-50/40
63×1 1/2"	63钢塑	63	48	375	80	230	1 1/2"	40	XDGS-63/40
63×2"	63钢塑	63	57	375	80	230	2"	50	XDGS-63/57
63×2"	63钢塑	63	60	375	80	230	2"	50	XDGS-63/50
75×2 1/2"	75钢塑	75	76	570	80	370	2 1/2"	63	XDGS-75/63
90×2 1/2"	90钢塑	90	76	570	100	370	2 1/2"	63	XDGS-90/76
90×3"	90钢塑	90	89	570	100	370	3"	80	XDGS-90/89
110×3"	110钢塑	110	89	570	100	370	3"	80	XDGS-110/89
110×4"	110钢塑	110	108	570	100	370	4"	100	XDGS-110/108
160×6"	160钢塑	160	159	560	160	310	6"	150	XDGS-160/159
200	200钢塑	200	203	580	150	330	-	-	XDGS-200/203
200	200钢塑	200	219	580	150	330	-	-	XDGS-200/219
250	250钢塑	250	245	650	180	360	-	-	XDGS-250/245
250	250钢塑	250	273	650	180	360	-	-	XDGS-250/273
315	315钢塑	315	299	650	210	350	-	-	XDGS-315/299
315	315钢塑	315	325	650	190	460	-	-	XDGS-315/325

弯管式钢塑转换接头  
PE Steel Transition Pipe Elbow

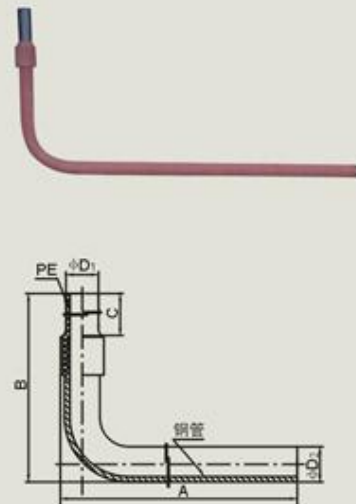


规格 (Specifications)		PE $\phi D_1$	钢管 $\phi D_2$	A	B	C	钢管 英寸	钢管 口径	订货编号 (Item Number)
通称	俗称								
25×3/4"	25钢塑	25	27	740	410	80	3/4"	20	XDLS-25/20
32×1"	32钢塑	32	34	740	410	80	1"	25	XDLS-32/25
40×1"	40钢塑	40	34	740	410	80	1"	25	XDLS-40/25
40×1 1/4"	40钢塑	40	42	740	410	80	1 1/4"	32	XDLS-40/32
50×1 1/2"	50钢塑	50	48	740	410	80	1 1/2"	40	XDLS-50/40
63×1 1/2"	63钢塑	63	48	740	430	80	1 1/2"	40	XDLS-63/40
63×2"	63钢塑	63	57	740	430	80	2"	50	XDLS-63/57
63×2"	63钢塑	63	60	740	430	80	2"	53	XDLS-63/60

**注** 1.根据用户需要可定制生产。2.订货请注明详细规格。3.产品尺寸仅供参考。  
1.Can be customized. 2 Please mark specifications in the order. 3.The sizes for your reference only.


## 钢塑系列 PE/Steel Transition Fitting Series

丝扣式转换接头  
PE/Steel Transition Threaded

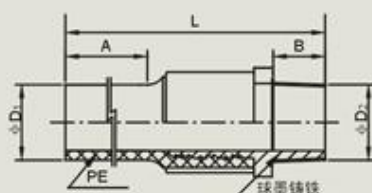

规格 (Specifications)	PE 通称	俗称	PE $\phi D_1$	管牙 $\phi D_2$	L	A	B	丝扣管 英寸	订货编号 (Item Number)
32×1"	32丝扣		32		170	80	25	1"	XDKS-32/25
40×1 1/4"	40丝扣		40	1英寸	170	80	25	1 1/4"	XDKS-40/32
50×1 1/2"	50丝扣		50	1 1/2英寸	170	80	25	1 1/2"	XDKS-50/40
63×2"	63丝扣		63		170	80	25	2"	XDKS-63/50

喷塑防腐钢法兰片 (PN1.0MPa)  
Nylon Coated Flange Plate (PN1.0MPa)




规格 (Specifications)	PE 俗称	标准 俗称	$\phi D$ 外径	$\phi d$ 中心孔	K 孔距	$\phi E$ 孔径	n 孔数	螺栓	订货编号 (Item Number)
40		32	130	47	100	18	4	M16	XDO10-40
50		40	140	57	110	18	4		XDO10-50
63		50	155	70	125	18	4		XDO10-63
75		65	177	82	145	18	4		XDO10-75
90		80	190	97	160	18	8		XDO10-90
110		100	212	117	180	18	8		XDO10-110
125		100	212	132	180	18	8		XDO10-125
140		125	240	147	210	18	8		XDO10-140
160		150	277	167	240	22	8	M20	XDO10-160
180		150	277	187	240	22	8		XDO10-180
200		200	330	207	295	22	8		XDO10-200
225		200	330	232	295	22	8		XDO10-225
250		250	385	257	350	22	12		XDO10-250
280		250	385	287	350	22	12		XDO10-280
315		300	440	325	400	22	12		XDO10-315
355		350	500	365	460	22	16		XDO10-355
400		400	560	410	515	26	16	M24	XDO10-400
450		450	610	460	565	26	20		XDO10-450
500		500	665	510	620	26	20		XDO10-500
560		600	775	570	725	26	20	M27	XDO10-560
630		600	775	640	725	30	20		XDO10-630
710		700	890	720	840	30	24		XDO10-710
800		800	1010	815	950	33	24	M30	XDO10-800
900		900	1110	915	1050	33	28		XDO10-900
1000		1000	1220	1015	1160	36	28		XDO10-1000

# 钢塑系列 PE/Steel Transition Fitting Series



喷塑防腐钢法兰片(PN1.6MPa)  
Nylon Coated Flange Plate (PN1.6MPa)

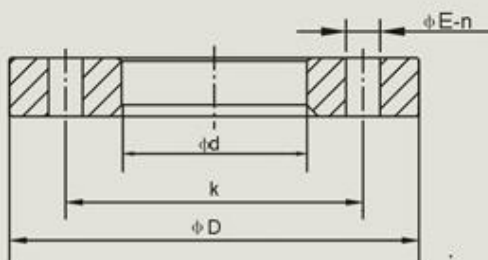


规格 (Specifications)		$\phi D$ 外径	K 孔距	$\phi E-n$ 孔径 孔数		订货编号 (Item Number)
PE俗称	标准俗称					
40	32	130	100	18	4	XDO-40
50	40	140	110	18	4	XDO-50
63	50	155	125	18	4	XDO-63
75	65	177	145	18	4	XDO-75
90	80	190	160	18	8	XDO-90
110	100	212	180	18	8	XDO-110
125	100	212	180	18	8	XDO-125
140	125	240	210	18	8	XDO-140
160	150	277	240	22	8	XDO-160
180	150	277	240	22	8	XDO-180
200	200	330	295	22	8	XDO-200
225	200	330	295	22	8	XDO-225
250	250	385	350	22	12	XDO-250
280	250	385	350	22	12	XDO-280
315	300	440	400	22	12	XDO-315
355	350	500	460	22	16	XDO-355
400	400	560	515	26	16	XDO-400
450	450	610	565	26	20	XDO-450
500	500	665	620	26	20	XDO-500
560	600	775	725	26	20	XDO-560
630	600	775	725	30	20	XDO-630

注 1.根据用户需要可定制生产。2.订货请注明详细规格。3.产品尺寸仅供参考。  
1.Can be customized. 2 Please mark specifications in the order. 3.The sizes for your reference only.




## 球阀系列 Ball Valves Fitting Series

标准型PE球阀  
PE Ball Valves




规格 (Specifications) ϕ D	L	A	H	ϕ d	订货编号 (Item Number)
50	480	110	185	41	XDQ-50
63	510	110	185	49	XDQ-63
90	720	160	320	70	XDQ-90
110	720	160	320	87	XDQ-110
160	780	140	430	126	XDQ-160
200	780	140	430	159	XDQ-200
250	960	160	610	195	XDQ-250
315	960	160	610	255	XDQ-315

单放散型PE球阀  
One-purge Ball Valves

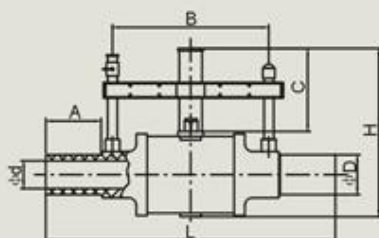

规格 (Specifications) ϕ D	L	A	B	C	H	ϕ d	订货编号 (Item Number)
90	720	160	350	740	980	70	XDQA-90
110	720	160	350	740	980	87	XDQA-110
160	780	140	420	740	1080	126	XDQA-160
200	780	140	420	740	1080	159	XDQA-200
250	960	160	600	740	1220	195	XDQA-250
315	960	160	600	740	1220	255	XDQA-315

双放散型PE球阀  
Two-purge Ball Valves

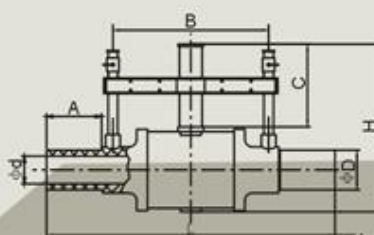


规格 (Specifications) ϕ D	L	A	B	C	H	ϕ d	订货编号 (Item Number)
90	720	160	350	740	980	70	XDQB-90
110	720	160	350	740	980	87	XDQB-110
160	780	140	420	740	1080	126	XDQB-160
200	780	140	420	740	1080	159	XDQB-200
250	960	160	600	740	1220	198	XDQB-250
315	960	160	600	740	1220	255	XDQB-315

## 热熔系列 Butt Fusion Fitting Series



注塑管帽  
End Cap

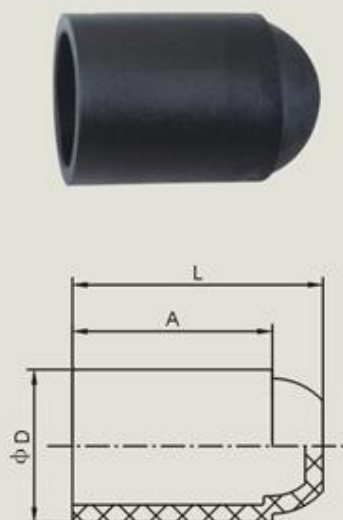

规格 (Specifications) $\phi D$	L	A	订货编号 (Item Number)
20	50	41	XDRM-20
25	50	41	XDRM-25
32	60	44	XDRM-32
40	65	49	XDRM-40
50	80	55	XDRM-50
63	90	63	XDRM-63
75	80	70	XDRM-75
90	105	79	XDRM-90
110	100	82	XDRM-110
125	115	87	XDRM-125
160	125	98	XDRM-160
200	200	112	XDRM-200
225	150	120	XDRM-225
250	160	110	XDRM-250
315	200	120	XDRM-315
355	215	155	XDRM-355
400	220	160	XDRM-400
500	240	190	XDRM-500
630	260	190	XDRM-630


注塑四通  
Cross fitting



规格 (Specifications) $\phi D$	L	A	B	C	E	H	订货编号 (Item Number)
63	230	55	80	90	115	205	XDRX-63
90	295	55	80	105	130	235	XDRX-90
110	365	55	125	115	185	300	XDRX-110
160	430	55	130	140	205	350	XDRX-160
200	420	55	90	160	200	360	XDRX-200
250	500	110	110	250	250	500	XDRX-250
315	615	130	130	307	307	614	XDRX-315
355	660	130	130	330	330	660	XDRX-355

**注** 1.根据用户需要可定制生产。 2.订货请注明详细规格。 3.在订货编号前注明 供燃气或供水用字样，避免 发货错误导致施工延误。 4.产品尺寸仅供参考。  
1. Can be customized. 2. Please mark specifications in the order.  
3. In order to avoid any delay of the construction, please mark "FOR WATER" or "FOR GAS" 4. The sizes for your reference only.

## 热熔异径三通 Reducing Tee

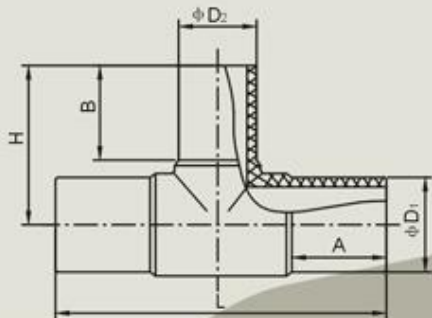


规格 (Specifications) $\phi D_1 \times \phi D_2 \times \phi D_1$	L	A	B	H	订货编号 (Item Number)
50×25×50	170	55	41	70	XDRST-50/25
50×32×50	170	55	44	73	XDRST-50/32
50×40×50	170	55	49	80	XDRST-50/40
63×25×63	200	65	41	75	XDRST-63/25
63×32×63	200	65	44	80	XDRST-63/32
63×40×63	200	65	49	85	XDRST-63/40
63×50×63	200	65	55	90	XDRST-63/50
75×32×75	230	65	44	105	XDRST-75/32
75×40×75	230	65	49	110	XDRST-75/40
75×50×75	230	65	55	115	XDRST-75/50
75×63×75	230	65	65	120	XDRST-75/63
90×32×90	205	80	44	100	XDRST-90/32
90×40×90	215	80	49	105	XDRST-90/40
90×50×90	225	80	55	110	XDRST-90/50
90×63×90	235	80	63	120	XDRST-90/63
90×75×90	250	80	70	130	XDRST-90/75
110×32×110	220	82	44	120	XDRST-110/32
110×40×110	230	82	49	125	XDRST-110/40
110×50×110	240	82	55	130	XDRST-110/50
110×63×110	250	82	63	140	XDRST-110/63
110×75×110	265	82	70	150	XDRST-110/75
110×90×110	280	82	79	160	XDRST-110/90
125×75×125	320	85	70	150	XDRST-125/75
125×90×125	320	85	70	150	XDRST-125/90
125×110×125	320	85	80	150	XDRST-125/110
140×90×140	300	92	79	160	XDRST-140/90
140×110×140	320	92	82	165	XDRST-140/110
140×125×140	335	92	87	170	XDRST-140/125
160×50×160	280	100	55	150	XDRST-160/50
160×63×160	290	100	63	157	XDRST-160/63
160×75×160	300	100	70	165	XDRST-160/75
160×90×160	315	100	79	175	XDRST-160/90
160×110×160	320	95	82	180	XDRST-160/110
180×90×180	350	105	80	180	XDRST-180/90
180×110×180	370	105	82	180	XDRST-180/110
180×160×180	420	105	98	200	XDRST-180/160
200×63×200	315	112	63	160	XDRST-200/63
200×75×200	325	112	70	165	XDRST-200/75
200×90×200	340	112	79	175	XDRST-200/90
200×110×200	360	112	82	180	XDRST-200/110
200×160×200	380	75	95	200	XDRST-200/160
225×90×225	360	120	79	210	XDRST-225/90
225×110×225	380	120	82	210	XDRST-225/110



## 热熔系列 Butt Fusion Fitting Series




热熔异径三通  
Reducing Tee

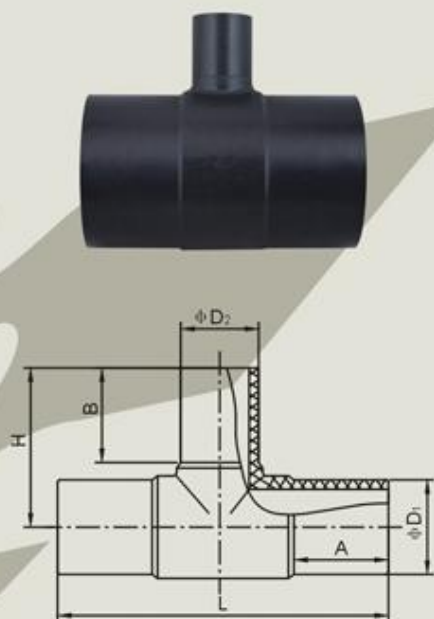

规格 (Specifications) $\phi D_1 \times \phi D_2 \times \phi D_1$	L	A	B	H	订货编号 (Item Number)
225×160×225	430	120	98	215	XDRST-225/160
250×90×250	395	105	75	220	XDRST-250/90
250×110×250	395	105	75	220	XDRST-250/110
250×160×250	395	105	75	230	XDRST-250/160
250×200×250	395	85	75	230	XDRST-250/200
280×90×280	400	139	79	250	XDRST-280/90
280×110×280	420	139	82	255	XDRST-280/110
280×160×280	470	139	98	260	XDRST-280/160
280×200×280	510	139	112	270	XDRST-280/200
280×225×280	535	139	120	280	XDRST-280/225
280×250×280	560	139	130	290	XDRST-280/250
315×90×315	420	150	79	260	XDRST-315/90
315×110×315	440	150	82	260	XDRST-315/110
315×160×315	465	110	80	260	XDRST-315/160
315×200×315	465	110	80	260	XDRST-315/200
315×225×315	615	135	110	290	XDRST-315/225
315×250×315	465	95	80	260	XDRST-315/250
315×280×315	615	135	110	290	XDRST-315/280
355×250×355	620	120	120	290	XDRST-355/250
355×315×355	620	120	120	290	XDRST-355/315
400×315×400	670	130	150	380	XDRST-400/315
400×355×400	670	130	150	380	XDRST-400/355

热熔等径三通  
Equal Tee

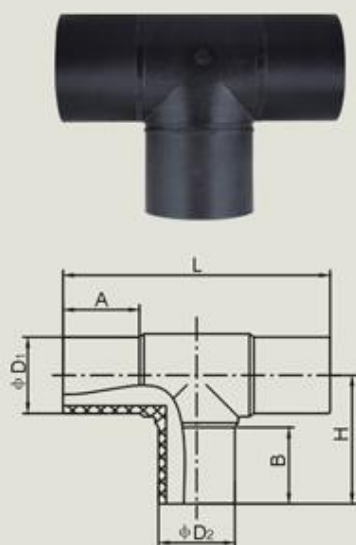


规格 (Specifications) $\phi D_1 \times \phi D_2 \times \phi D_1$	L	A	B	H	订货编号 (Item Number)
50×50×50	170	55	55	90	XDRT-50
63×63×63	200	65	65	105	XDRT-63
75×75×75	230	65	65	120	XDRT-75
90×90×90	265	80	80	130	XDRT-90
110×110×110	300	82	82	150	XDRT-110
125×125×125	320	85	85	160	XDRT-125
140×140×140	350	92	92	170	XDRT-140
160×160×160	325	75	75	170	XDRT-160
180×180×180	440	105	105	200	XDRT-180
200×200×200	380	75	85	200	XDRT-200
225×225×225	430	90	90	210	XDRT-225
250×250×250	520	120	120	260	XDRT-250
280×280×280	590	140	140	300	XDRT-280
315×315×315	615	120	120	310	XDRT-315
355×355×355	630	120	120	350	XDRT-355
400×400×400	670	120	120	360	XDRT-400

注

1. 根据用户需要可定制生产。2. 订货请注明详细规格。3. 在订货编号前注明 供燃气或供水用水字样，避免 发货错误导致施工延误。4. 产品尺寸仅供参考。  
1. Can be customized. 2. Please mark specifications in the order.  
3. In order to avoid any delay of the construction, please mark "FOR WATER" or "FOR GAS" 4. The sizes for your reference only.

热熔异径  
Reducer

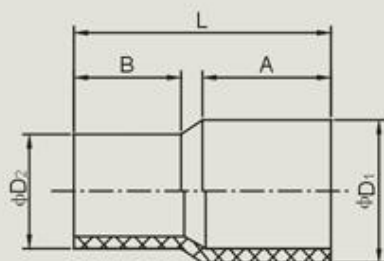


规格 (Specifications) $\phi D_1 \times \phi D_2$	L	A	B	订货编号 (Item Number)
63×25	125	65	41	XDRS-63/25
63×32	128	65	44	XDRS-63/32
63×40	133	65	49	XDRS-63/40
63×50	150	65	55	XDRS-63/50
75×32	135	70	44	XDRS-75/32
75×40	140	70	49	XDRS-75/40
75×50	145	70	55	XDRS-75/50
75×63	150	70	60	XDRS-75/63
90×32	155	80	44	XDRS-90/32
90×40	165	80	49	XDRS-90/40
90×50	170	80	55	XDRS-90/50
90×63	175	80	65	XDRS-90/63
90×75	175	80	70	XDRS-90/75
110×40	160	82	49	XDRS-110/40
110×50	165	82	55	XDRS-110/50
110×63	175	82	65	XDRS-110/63
110×75	175	82	65	XDRS-110/75
110×90	175	82	65	XDRS-110/90
125×63	190	85	65	XDRS-125/63
125×90	190	85	80	XDRS-125/90
125×110	190	85	80	XDRS-125/110
140×63	220	92	63	XDRS-140/63
140×90	225	92	80	XDRS-140/90
140×110	225	92	80	XDRS-140/110
160×32	180	100	44	XDRS-160/32
160×63	200	100	63	XDRS-160/63
160×75	205	100	70	XDRS-160/75
160×90	115	100	82	XDRS-160/90
160×110	200	100	85	XDRS-160/110
160×125	200	100	85	XDRS-160/125
180×90	225	105	75	XDRS-180/90
180×110	225	105	80	XDRS-180/110
180×160	225	105	85	XDRS-180/160
200×63	210	110	63	XDRS-200/63
200×90	225	110	79	XDRS-200/90
200×110	230	110	85	XDRS-200/110
200×160	220	110	85	XDRS-200/160

# 热熔系列 Butt Fusion Fitting Series



热熔异径  
Reducer

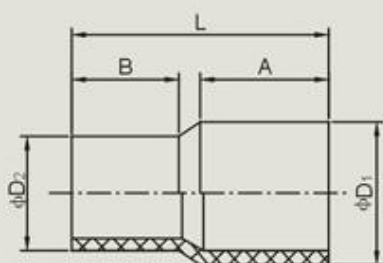

规格 (Specifications) φ D <sub>1</sub> X φ D <sub>2</sub>	L	A	B	订货编号 (Item Number)
225 × 110	250	105	82	XDRS-225/110
225 × 160	250	105	90	XDRS-225/160
225 × 200	250	105	90	XDRS-225/200
250 × 110	225	105	82	XDRS-250/110
250 × 125	225	105	82	XDRS-250/125
250 × 160	240	105	98	XDRS-250/160
250 × 200	245	105	105	XDRS-250/200
280 × 160	250	110	90	XDRS-280/160
280 × 200	250	105	90	XDRS-280/200
280 × 225	250	105	95	XDRS-280/225
280 × 250	250	110	90	XDRS-280/250
315 × 90	230	110	79	XDRS-315/90
315 × 110	240	110	82	XDRS-315/110
315 × 160	250	110	100	XDRS-315/160
315 × 180	250	120	95	XDRS-315/180
315 × 200	250	100	95	XDRS-315/200
315 × 225	250	100	110	XDRS-315/225
315 × 250	250	100	100	XDRS-315/250
355 × 200	270	100	100	XDRS-355/200
355 × 250	270	100	100	XDRS-355/250
355 × 315	240	100	100	XDRS-355/315
400 × 200	250	100	100	XDRS-400/200
400 × 250	250	100	100	XDRS-400/250
400 × 315	250	100	100	XDRS-400/315
400 × 355	250	100	100	XDRS-400/355
450 × 200	260	100	100	XDRS-450/200
450 × 250	260	100	100	XDRS-450/250
450 × 315	250	100	100	XDRS-450/315
450 × 355	250	100	100	XDRS-450/355
450 × 400	240	100	100	XDRS-450/400
500 × 400	250	100	100	XDRS-500/400
500 × 450	250	100	100	XDRS-500/450
560 × 500	260	100	100	XDRS-560/500
630 × 500	260	100	100	XDRS-630/500


注

1. 根据用户需要可定制生产。2. 订货请注明详细规格。3. 在订货编号前注明 供燃气或供水用水字样，避免 发货错误导致施工延误。4. 产品尺寸仅供参考。  
1. Can be customized. 2. Please mark specifications in the order.  
3. In order to avoid any delay of the construction, please mark "FOR WATER" or "FOR GAS" 4. The sizes for your reference only.




## 热熔系列 Butt Fusion Fitting Series

热熔90° 弯头  
Elbow 90°

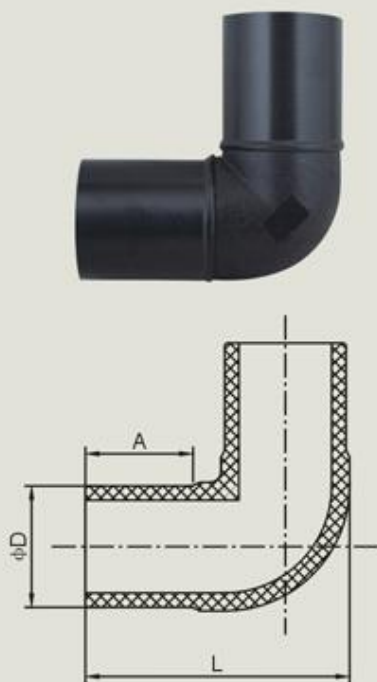

规格 (Specifications) φ DX90°	L	A	订货编号 (Item Number)
50×90°	110	55	XDRL-50
63×90°	130	63	XDRL-63
75×90°	165	70	XDRL-75
90×90°	190	80	XDRL-90
110×90°	210	80	XDRL-110
125×90°	230	87	XDRL-125
140×90°	240	90	XDRL-140
160×90°	260	95	XDRL-160
180×90°	295	100	XDRL-180
200×90°	300	95	XDRL-200
225×90°	370	110	XDRL-225
250×90°	360	100	XDRL-250
280×90°	430	140	XDRL-280
315×90°	435	130	XDRL-315
355×90°	540	150	XDRL-355
400×90°	620	180	XDRL-400

热熔45° 弯头  
Elbow 45°

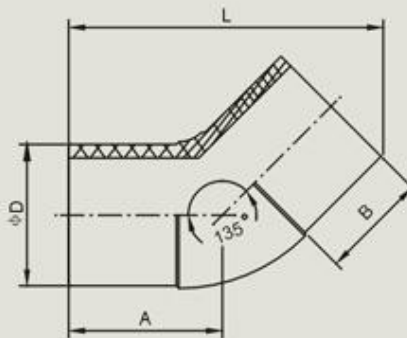


规格 (Specifications) φ DX45°	L	A	B	订货编号 (Item Number)
63×45°	155	80	60	XDRV-63
90×45°	230	110	80	XDRV-90
110×45°	240	120	82	XDRV-110
125×45°	240	120	85	XDRV-125
160×45°	290	130	90	XDRV-160
200×45°	340	160	100	XDRV-200
250×45°	420	190	125	XDRV-250
315×45°	500	225	140	XDRV-315

# 热熔系列 Butt Fusion Fitting Series



注塑垫环  
Flange adaptor (Stub End)

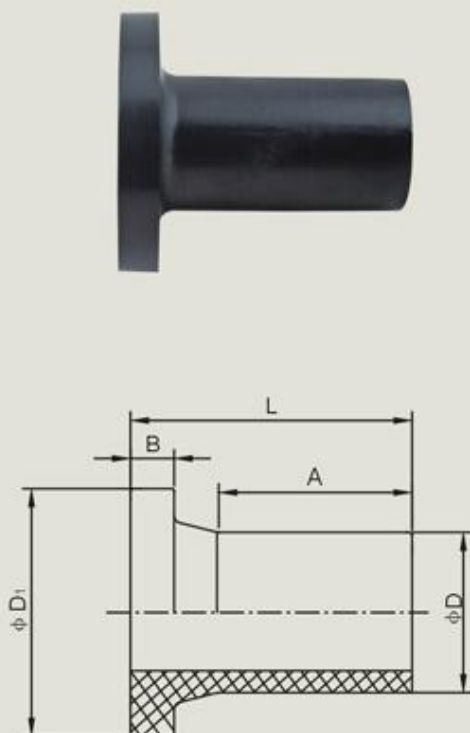

规格 (Specifications) $\phi D$	$\phi D_1$	L	A	B	订货编号 (Item Number)
20	45	83	65	7	XDRD-20
25	58	83	60	9	XDRD-25
32	68	83	60	10	XDRD-32
40	78	85	65	12	XDRD-40
50	88	85	65	12	XDRD-50
63	102	90	70	15	XDRD-63
75	120	95	75	15	XDRD-75
90	138	100	75	18	XDRD-90
110	158	105	82	18	XDRD-110
125	158	115	85	22	XDRD-125
140	188	130	100	22	XDRD-140
160	212	130	105	22	XDRD-160
180	212	130	95	28	XDRD-180
200	268	155	115	30	XDRD-200
225	268	140	100	30	XDRD-225
250	320	160	120	30	XDRD-250
280	320	140	100	30	XDRD-280
315	370	170	130	34	XDRD-315
355	430	180	130	34	XDRD-355
400	482	180	140	34	XDRD-400
450	525	180	130	45	XDRD-450
500	580	215	160	45	XDRD-500
560	685	215	160	45	XDRD-560
630	685	220	150	56	XDRD-630A
630	720	220	150	56	XDRD-630B
710	800	185	110	56	XDRD-710
800	905	185	110	56	XDRD-800
900	1005	185	110	56	XDRD-900
1000	1100	185	110	56	XDRD-1000



1. 根据用户需要可定制生产。 2. 订货请注明详细规格。 3. 在订货编号前注明 供燃气或供水用字样，避免 发货错误导致施工延误。 4. 产品尺寸仅供参考。  
1. Can be customized. 2. Please mark specifications in the order.  
3. In order to avoid any delay of the construction, please mark "FOR WATER" or "FOR GAS" 4. The sizes for your reference only.

## 承插系列 Socket Joint Series

承插套管  
Equal coupling



规格 (Specifications)	订货编号 (Item Number)
20	XDCL-20
25	XDCL-25
32	XDCL-32
40	XDCL-40
50	XDCL-50
63	XDCL-63
75	XDCL-75

承插异径套管  
Reducing coupling



规格 (Specifications)	订货编号 (Item Number)	规格 (Specifications)	订货编号 (Item Number)
25 × 20	XDCS-25/20	63X20	XDCS-63/20
32 × 20	XDCS-32/20	63X25	XDCS-63/25
32 × 25	XDCS-32/25	63X32	XDCS-63/32
40 × 20	XDCS-40/20	63X40	XDCS-63/40
40 × 25	XDCS-40/25	63X50	XDCS-63/50
40 × 32	XDCS-40/32	75X32	XDCS-75/32
50 × 20	XDCS-50/20	75X40	XDCS-75/40
50 × 25	XDCS-50/25	75X50	XDCS-75/50
50 × 32	XDCS-50/32	75X63	XDCS-75/63
50 × 40	XDCS-50/40		

承插90° 弯头  
90° Equal Elbow



规格 (Specifications)	订货编号 (Item Number)
20	XDCL-20
25	XDCL-25
32	XDCL-32
40	XDCL-40
50	XDCL-50
63	XDCL-63
75	XDCL-75



## 承插系列 Socket Joint Series



承插45° 弯头  
45° Equal Elbow



规格 (Specifications)	订货编号 (Item Number)
20	XDCVL-20
25	XDCVL-25
32	XDCVL-32
40	XDCVL-40
50	XDCVL-50
63	XDCVL-63
75	XDCVL-75

承插等径三通  
Equal Tee



规格 (Specifications)	订货编号 (Item Number)
20	XDCT-20
25	XDCT-25
32	XDCT-32
40	XDCT-40
50	XDCT-50
63	XDCT-63
75	XDCT-75

承插异径三通  
Reducing Tee



规格 (Specifications)	订货编号 (Item Number)	规格 (Specifications)	订货编号 (Item Number)
25×20	XDCST-25/20	50×40	XDCST-50/40
32×20	XDCST-32/20	63×20	XDCST-63/20
32×25	XDCST-32/25	63×25	XDCST-63/25
40×20	XDCST-40/20	63×32	XDCST-63/32
40×25	XDCST-40/25	63×40	XDCST-63/40
40×32	XDCST-40/32	63×50	XDCST-63/50
50×20	XDCST-50/20	75×40	XDCST-75/40
50×25	XDCST-50/25	75×50	XDCST-75/50
50×32	XDCST-50/32	75×63	XDCST-75/63

**注** 1.根据用户需要可定制生产。2.订货请注明详细规格。3.产品尺寸仅供参考。  
1.Can be customized. 2 Please mark specifications in the order. 3.The sizes for your reference only.

## 承插系列 Socket Joint Series

承插管帽  
End Cap



规格 (Specifications)	订货编号 (Item Number)
20	XDCM-20
25	XDCM-25
32	XDCM-32
40	XDCM-40
50	XDCM-50
63	XDCM-63
75	XDCM-75

承插垫环  
Socket washer



规格 (Specifications)	订货编号 (Item Number)
40	XDCD-40
50	XDCD-50
63	XDCD-63
75	XDCD-75

承插内螺纹直接  
Female adapter



规格 (Specifications)	订货编号 (Item Number)
20×1/2" F	XDCFI-20/1/2"
25×1/2" F	XDCFI-25/1/2"
25×3/4" F	XDCFI-25/3/4"
32×1" F	XDCFI-32/1"
32×1/2" F	XDCFI-32/1/2"
32×3/4" F	XDCFI-32/3/4"
40×1 1/8" F	XDCFI-40/1 1/8"
50×1 1/2" F	XDCFI-50/1 1/2"
63×2" F	XDCFI-63/2"

## 承插系列 Socket Joint Series



承插外螺纹直接  
Male adapter



规格 (Specifications)	订货编号 (Item Number)
20×1/2" M	XDCMI-20/1/2"
25×1/2" M	XDCMI-25/1/2"
25×3/4" M	XDCMI-25/3/4"
32×1" M	XDCMI-32/1"
32×1/2" M	XDCMI-32/1/2"
32×3/4" M	XDCMI-32/3/4"
40×1 1/4" M	XDCMI-40/1 1/4"
50×1 1/2" M	XDCMI-50/1 1/2"
63×2" M	XDCMI-63/2"

承插内螺纹弯头  
Female Elbow



规格 (Specifications)	订货编号 (Item Number)
20×1/2" F	XDCFL-20/1/2"
25×1/2" F	XDCFL-25/1/2"
25×3/4" F	XDCFL-25/3/4"
32×1" F	XDCFL-32/1"
32×1/2" F	XDCFL-32/1/2"
32×3/4" F	XDCFL-32/3/4"

承插外螺纹弯头  
Male Elbow



规格 (Specifications)	订货编号 (Item Number)
20×1/2" M	XDCML-20/1/2"
25×1/2" M	XDCML-25/1/2"
25×3/4" M	XDCML-25/3/4"
32×1" M	XDCML-32/1"
32×1/2" M	XDCML-32/1/2"
32×3/4" M	XDCML-32/3/4"

**注** 1.根据用户需要可定制生产。2.订货请注明详细规格。3.产品尺寸仅供参考。  
1.Can be customized. 2 Please mark specifications in the order. 3.The sizes for your reference only.



## 承插系列 Socket Joint Series

承插内螺纹三通  
Female Tee




规格 (Specifications)	订货编号 (Item Number)
20×1/2" F	XDCFT-20/1/2"
25×1/2" F	XDCFT-25/1/2"
25×3/4" F	XDCFT-25/3/4"
32×1" F	XDCFT-32/1"
32×1/2" F	XDCFT-32/1/2"
32×3/4" F	XDCFT-32/3/4"

承插外螺纹三通  
Male Tee



规格 (Specifications)	订货编号 (Item Number)
20×1/2" M	XDCMT-20/1/2"
25×1/2" M	XDCMT-25/1/2"
25×3/4" M	XDCMT-25/3/4"
32×1" M	XDCMT-32/1"
32×1/2" M	XDCMT-32/1/2"
32×3/4" M	XDCMT-32/3/4"

承插内螺纹活接  
Female Union

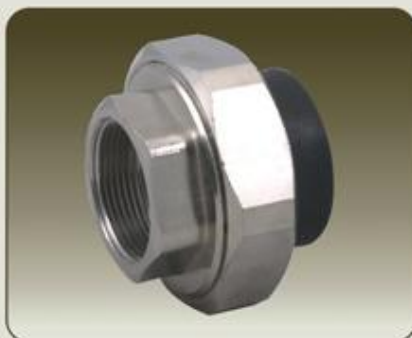

规格 (Specifications)	订货编号 (Item Number)
20×1/2" F	XDCFH-20/1/2"
25×3/4" F	XDCFH-25/3/4"
32×1" F	XDCFH-32/1"
40×1 1/4" F	XDCFH-40/1 1/4"
50×1 1/2" F	XDCFH-50/1 1/2"
63×2" F	XDCFH-63/2"

## 承插系列 Socket Joint Series



承插外螺纹活接  
Male Union



规格 (Specifications)	订货编号 (Item Number)
20 × 1/2" M	XDCMH-20/1/2"
25 × 3/4" M	XDCMH-25/3/4"
32 × 1" M	XDCMH-32/1"
40 × 1 1/4" M	XDCMH-40/1 1/4"
50 × 1 1/2" M	XDCMH-50/1 1/2"
63 × 2" M	XDCMH-63/2"

承插截止阀  
Stop Valve



规格 (Specifications)	订货编号 (Item Number)
20	XDCJ-20
25	XDCJ-25
32	XDCJ-32
40	XDCJ-40
50	XDCJ-50
63	XDCJ-63
75	XDCJ-75

**注** 1.根据用户需要可定制生产。2.订货请注明详细规格。3.产品尺寸仅供参考。  
1.Can be customized. 2 Please mark specifications in the order. 3.The sizes for your reference only.

## 新产品 New Products

热熔外丝对接丝扣接头  
Butt Fusion Male Adapter



规格 (Specifications)	订货编号 (Item Number)
20×1/2" M	XDRML-20/1/2"
25×3/4" M	XDRML-25/3/4"
32×1" M	XDRML-32/1"
40×1 1/4" M	XDRML-40/1 1/4"
50×1 1/2" M	XDRML-50/1 1/2"
63×2" M	XDRML-63/2"
90×3" M	XDRML-90/3"

热熔内丝对接丝扣接头  
Butt Fusion Female Adapter



规格 (Specifications)	订货编号 (Item Number)
20×1/2" F	XDRFL-20/1/2"
25×3/4" F	XDRFL-25/3/4"
32×1" F	XDRFL-32/1"
40×1 1/4" F	XDRFL-40/1 1/4"
50×1 1/2" F	XDRFL-50/1 1/2"
63×2" F	XDRFL-63/2"
90×3" F	XDRFL-90/3"

快速接头  
Compression Coupling



规格 (Specifications)	订货编号 (Item Number)
20×1/2" M	XDKSML-20/1/2"
25×3/4" M	XDKSML-25/3/4"
32×1" M	XDKSML-32/1"



## 新产品 New Products



快速接头  
Compression Elbow



规格 (Specifications)	订货编号 (Item Number)
20×1/2" M	XDKSML-20/1/2"
25×3/4" M	XDKSML-25/3/4"
32×1" M	XDKSML-32/1"

虹吸电熔套管  
Electrofusion Syphon Coupler



规格 (Specifications)	订货编号 (Item Number)
125	XDHXDI125
160	XDHXDI160
200	XDHXDI200
250	XDHXDI250
315	XDHXDI315

热熔多节异径  
Butt Fusion Stepped Reducer



规格 (Specifications)	订货编号 (Item Number)
180/160/125/110/90	XDDJR180/90
315/250/200/180/160	XDDJR315/160
400/355/315/250/200/180	XDDJR400/180

**注** 1.根据用户需要可定制生产。2.订货请注明详细规格。3.产品尺寸仅供参考。  
1.Can be customized. 2 Please mark specifications in the order. 3.The sizes for your reference only.

## 辅件系列 Tool & Accessories

示踪线  
Tracer line



直通鞍型切孔刀  
The Cutter For Branch Saddle



电熔焊机  
Electrofusion Machine



热熔对接机  
Butt Fusion Machine



承插焊接器  
Socket Welder



旋转割刀  
Rotating Cutter



管子割刀  
Pipe Cutter



刮刀  
Pipe Scraper



ZHEJIANG XINDA  
PLASTIC PIPE FITTING







**浙江新大塑料管件有限公司**  
**ZHEJIANG XINDA PLASTIC PIPE CO.,LTD.**

地址：浙江省余姚市河姆渡镇镇北路55号  
Add: NO.55 zhenbei Road, Hemudu Town, Yuyao, Zhejiang Province  
电话/ Tel: 0086-574-62951760 62951895  
传真/Fax: 0086-574-62951085  
Http://www.xdpipe.com  
Http://xdpipe.en.alibaba.com  
E-mail: xindags@mail.nbptt.zj.cn  
xindapipe@xdpipe.com  
邮编/P.C: 315414